Included Tools / Components



Wall Fasteners



Wall Screws



Silicon Edge Roller



Hex Drivers



Knuckle Connectors



REXframe® Sections



(Optional)

REXframe® Joints



Tension Bar



Baseplates



Baseplate Hardware



LED Light Bar



45-degree Connector

Suggested Tools (not included)



Drill with 1/4" Drill Bit
and Phillips Head Bit



Phillips Head
Screwdriver



Level



Tape Measure

Assembly Instructions



Step 1 - Assemble the Frame

- Each extrusion will be labeled at each connection point with a letter. "a" will attach to "a" - "b" to "b" and so on.
- Insert extrusion into knuckle and tighten.
- Slide the 45° connector into the channel. When flush, tighten both screws.
- If the joint is not square, loosen screws, push extrusions towards each other and re-tighten.
- Repeat this process for all four corners.



Step 2 - Assemble the Frame (for displays longer than 8')

- Each extrusion will be labeled at each connection joint with a letter. "b" will attach to "b" - "c" to "c" and so on.
- The REXframe® Joint slides into the extrusion channel as show.
- Only slide one end of the REXframe® Joint in the channel half way. Once in position, tighten screws into pre-drilled holes.
- Slide the opposite extrusion on to the other end of the REXframe® Joint
- Tighten both screws on second end.



Step 3 - Attach Baseplates

- Position frame on ground lying down.
- Prop up the baseplate end of the frame and position the baseplate holes to the holes in the extrusion.
- Using the baseplate hardware, push bolt through washer and extrusion into the baseplate and tighten.
- Repeat process for opposite bolt.
- Repeat this process for the other baseplate on the other side of the bottom extrusion.
- Stand frame upright.



Step 4 - Add Tension Bar (optional)

- Position tension bar near the center of the frame.
- The frame will be marked where to place the bar before tightening.
- Tighten screw to secure the bar.
- Tighten opposite screw.



Step 5 - Connect LED Lights (optional)

- Lights will ship attached to extrusions
- At break points in the extrusions where in-line connectors are, connect the female to male end at each break.
- Connect light chain to transformer by connecting the female end into the male end.
- Plug electric cord into a power source to check for connection issues.

Assembly Instructions (continued)



Step 6 - Attach Graphic Corners

- On the front side of the frame, insert fabric graphic into all 4 corners in diagonal order.
- Be sure printed side of graphic is facing out and the silicon edge is orientated as shown here.

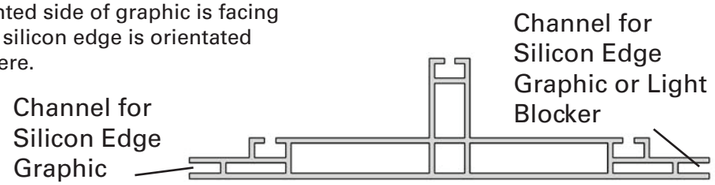



Step 7 - Attach Middles of Graphic

- Insert fabric edge only at the center of each channel, pushing directly into the channel.



Step 8 - Complete Assembly

- Use direct pressure to insert the remaining edge.
- Working out from the center toward each end.
- Use the Silicon Edge Roller (c) to force the Silicon Edge into the channel by firmly rolling the disk along the channel.
- Your graphic display is complete.
- Repeat Steps 6-8 for opposite side of frame.



The REXframe® extruded aluminum frames used in the assembly of Renze Studio displays are ADA-compliant, making them ideal for use in public spaces. Fabrics used in the manufacture of our large-scale displays are fully fire resistant, using water-based inks that are OEKO-EX® Standard 100 certified. Illumination for our back lit displays uses UL-approved, low-voltage LED lighting.

REXframe® Profile Characteristics

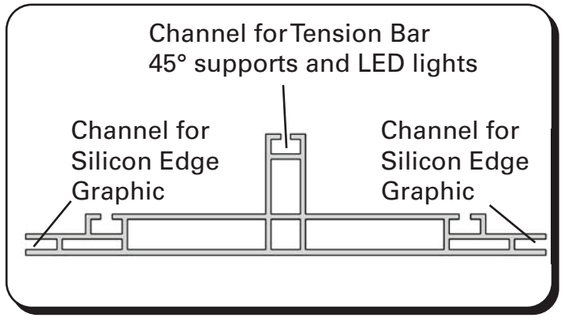

Graphic Care

- To release the graphic from its channel, gently pull on the small tag located in the bottom right corner.
- Launder your graphic using Woolite® (or similar) with the washer set to gentle or delicate cycle.
- Tumble dry on low heat.
- Store by gently folding the fabric and placing in a plastic bag.





Renze® Studio 6847 N 16th ST Omaha, NE 68112

P: (833) 830-0971 E: info@garagegraphics.net

Renze® Studio

Back Lit, Free Standing Display

Assembly Instructions

LARGER THAN LIFE

Discover a new way to see automotive art·with easy-to-install, wall-size images from your choice of celebrated artists.

RENZE® STUDIO

For more information visit:

renzestudio.com